


LumiSheet[★] RGB

LumiSheet RGB LED Light Panel has the same engineered benefits as standard LumiSheet plus the ability to change the color range to suit your needs.

Color Temperature

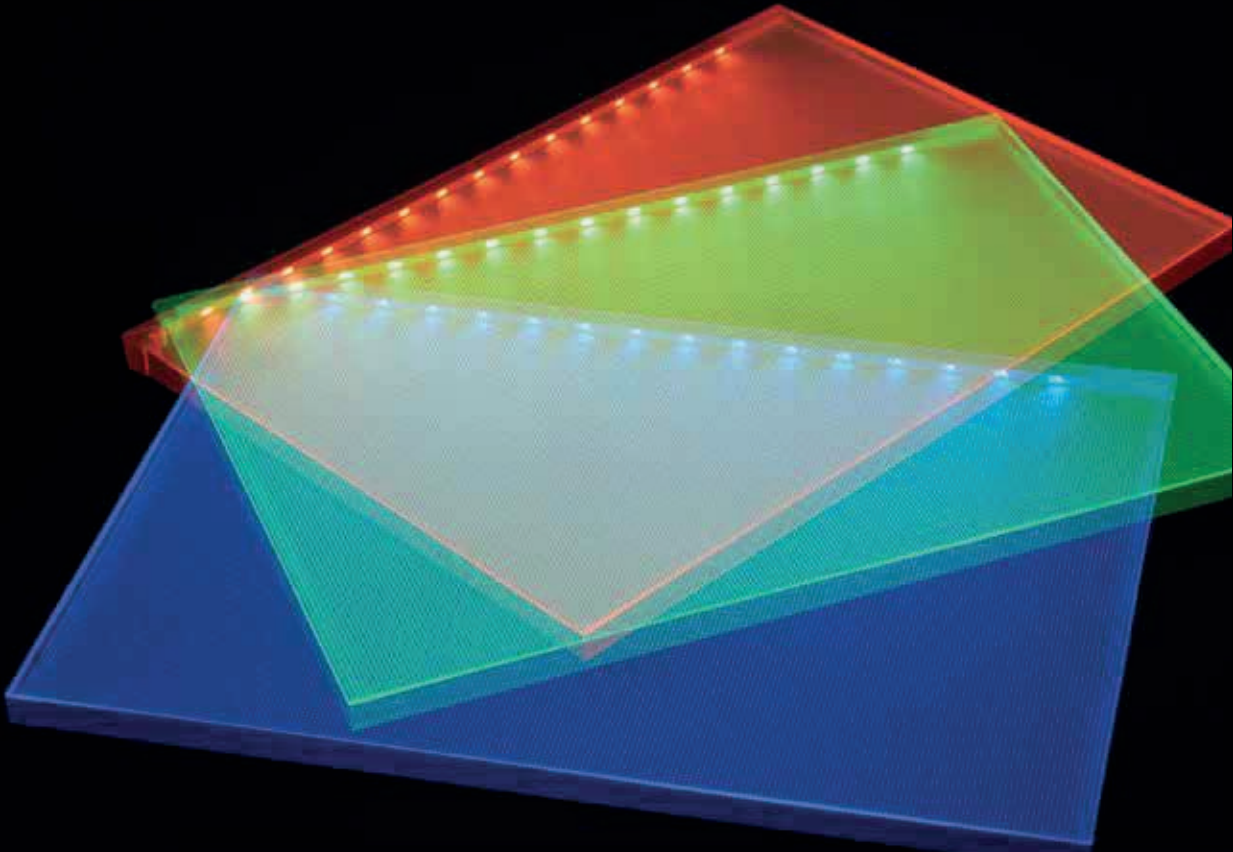

Features & Benefits


- Available in custom sizes and shapes
- Can be used in "Frameless" designs
- 3D v-cutting technology
- Patented heat sink technology to maximize LED lifespan (50,000 hours)
- Low power consumption (70% less than fluorescent lamp)
- Energy saving and maintenance free
- Superior consistent light quality

ITEM	DESCRIPTION
Input Voltage	12Volt DC
Maximum size (W×L)	1,500mm × 3,000mm (59" × 118")
Minimum size (W×L)	70mm × 70mm (2.8" × 2.8")
Thickness	8mm (0.31") / 10mm (0.39")
Color Temperature	RGB - Full color
Controller	DMX Control
Certification	
Operating Temperature	-20 °C ~ +40 °C
Lifetime	More than 50,000 hrs.
Warranty	2 years

LumiSheet[★] 2in1

LumiSheet 2in1 is a color temperature adjustable panel ranging from 2,800K to 6,700K. This model offers broad CCT coverage within a single light panel.

Color Temperature

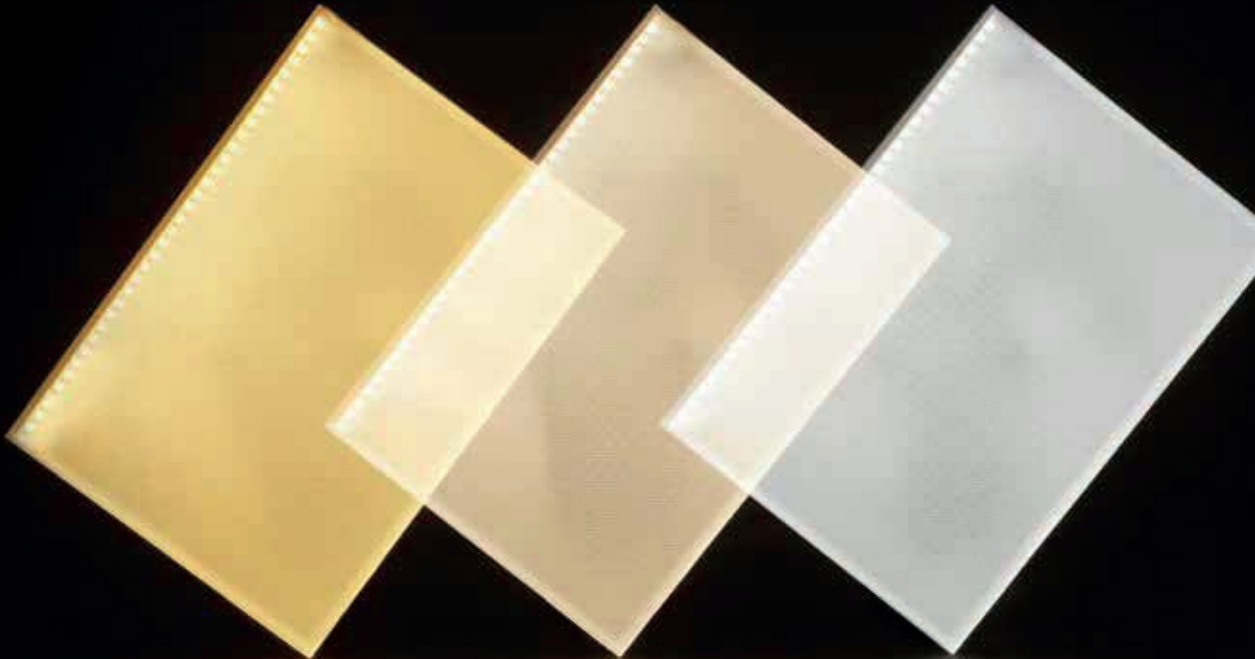

Warm White 2,800K • • • • • • • • • • Pure/Cool White 6,700K

Features & Benefits

- Available in custom sizes and shapes
- Color temperature can be adjusted from 2,800K ~ 6,700K
- Adjust multiple LumiSheets LED light panels with a control device
- Highly accurate, very stable driver

ITEM	DESCRIPTION
Input Voltage	12Volt DC
Maximum size (W×L)	1,500mm × 3,000mm (59" × 118")
Minimum size (W×L)	70mm × 70mm (2.8" × 2.8")
Thickness	8mm (0.31") / 10mm (0.39")
Color Temperature	2,800K ~ 6,700K
Controller	PWM Control
Certification	
Operating Temperature	-20 °C ~ +40 °C
Lifetime	More than 50,000 hrs.
Warranty	2 years