


LumiSheet Ad Tube (CE, G13 base)

LumiSheet Ad Tube is an LED tube that retrofits fluorescent tubes for various applications quickly and easily. LumiSheet Ad Tube is an ideal LED lighting solution for both double and single sided cabinet signs. When equipped with an optimized lens, uniformity of light distribution of Ad Tube is more than 85% and energy savings reach up to 60%.

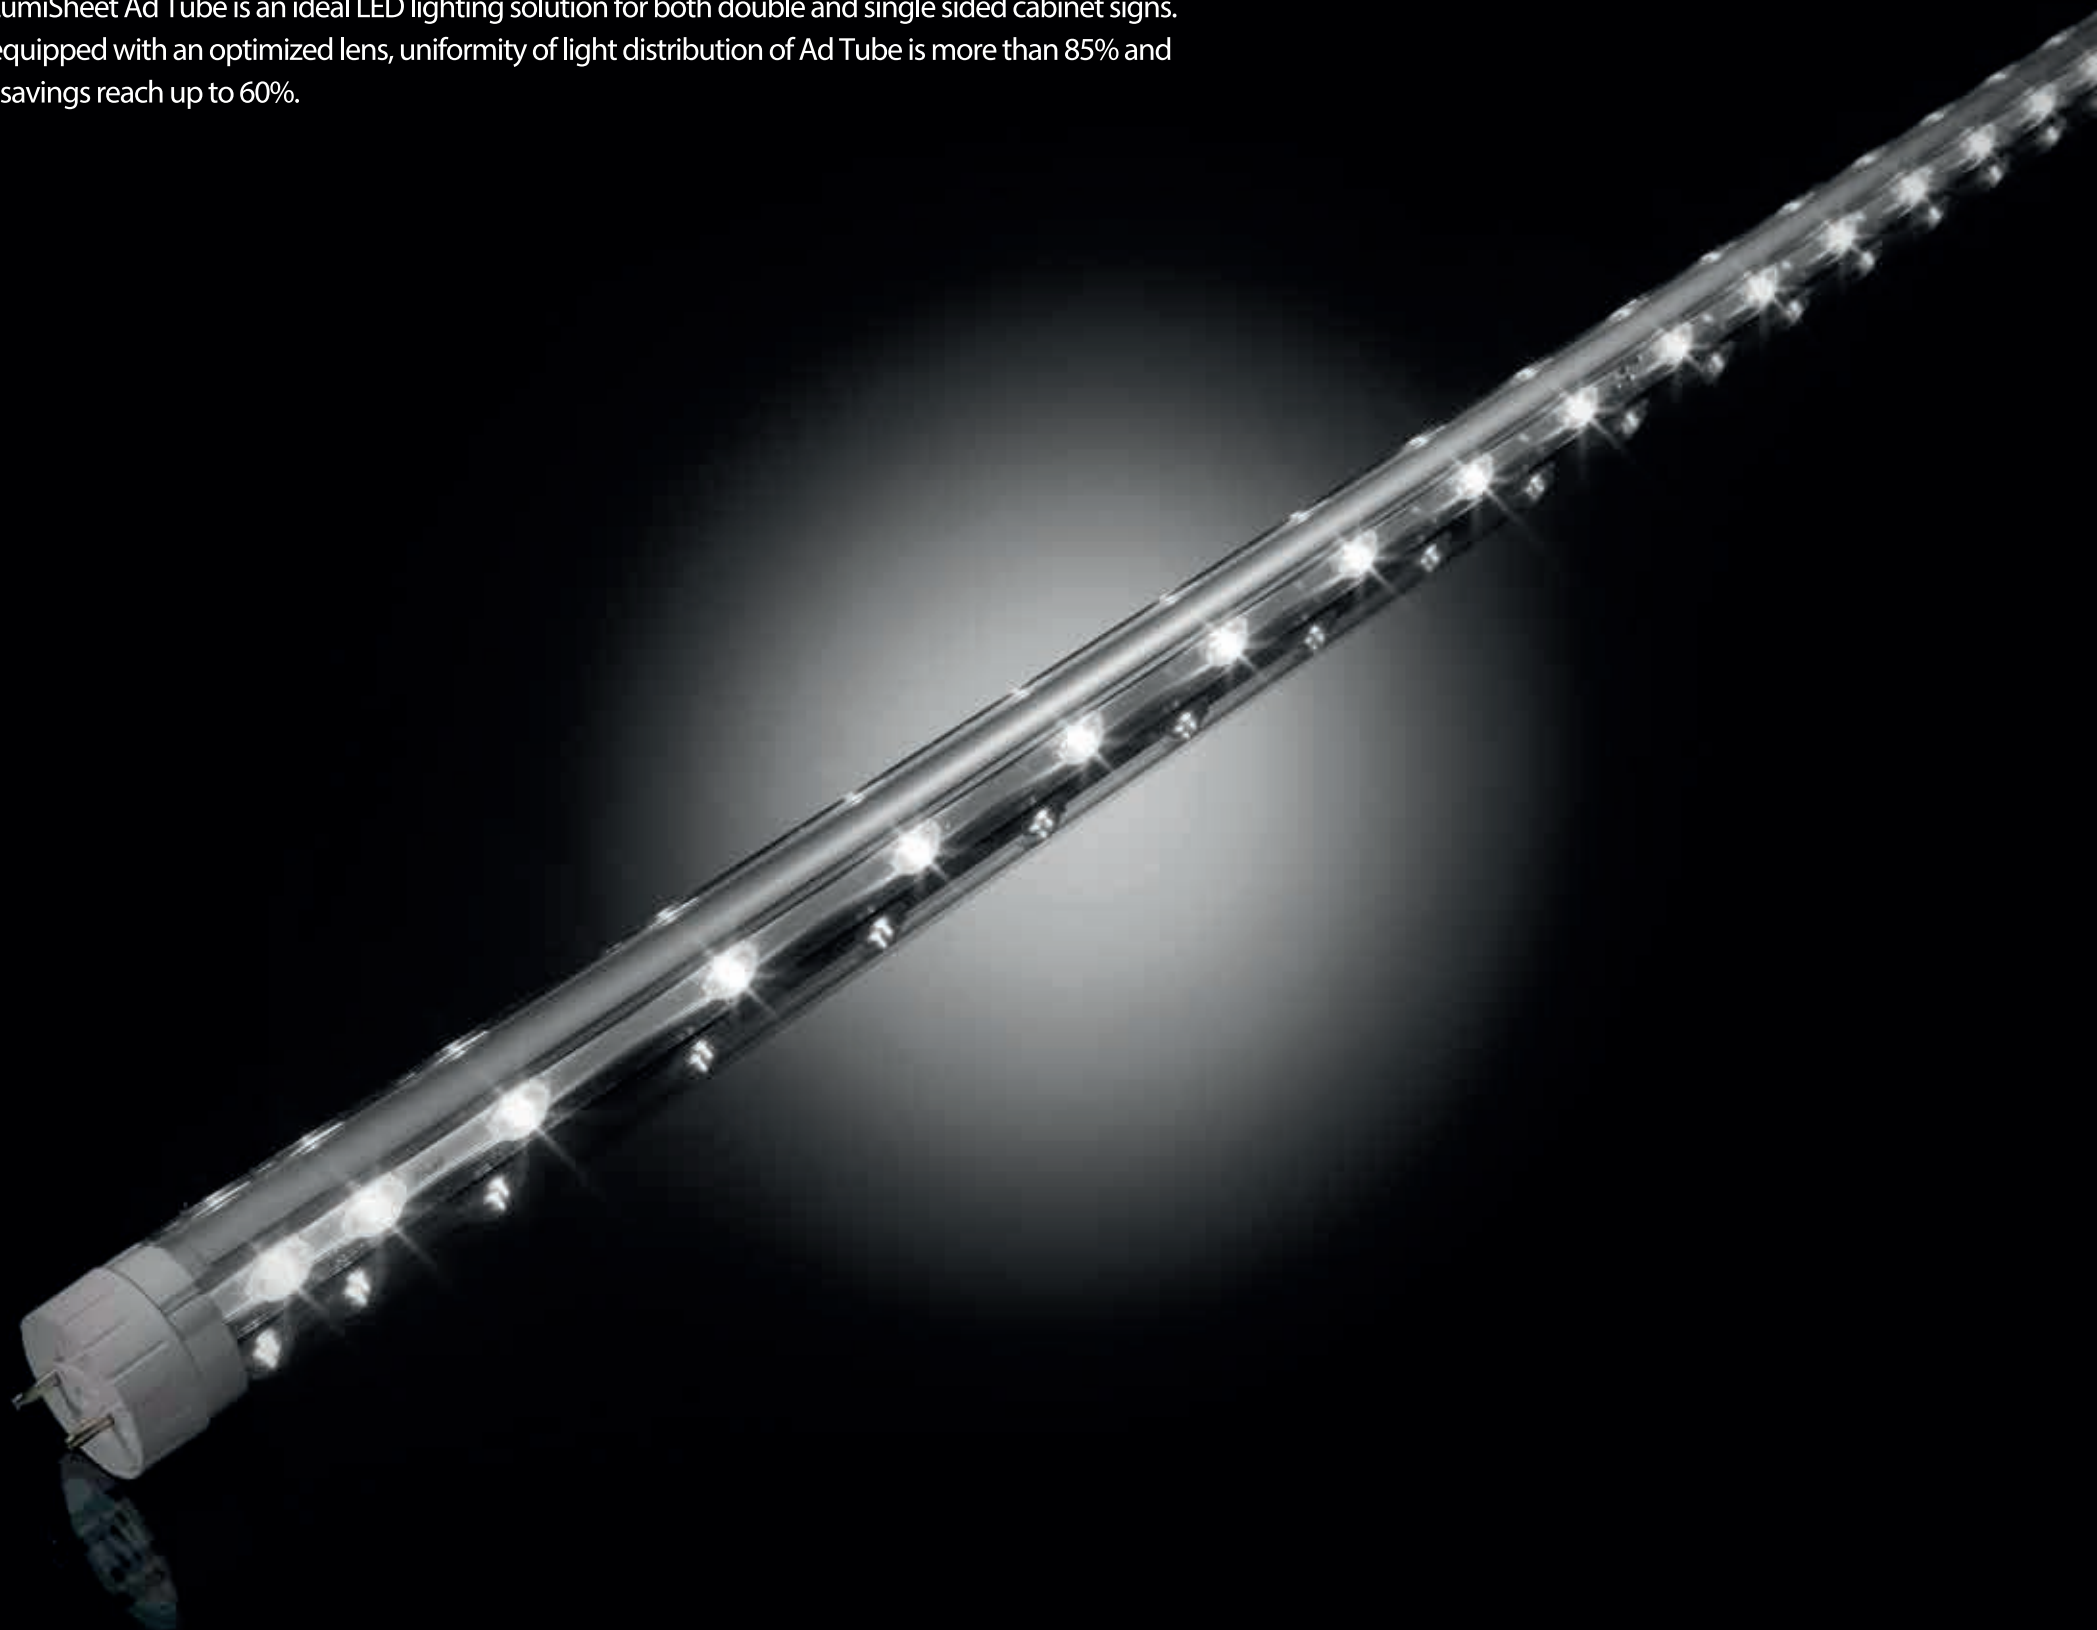


Features & Benefits

- Energy savings up to 60% (Conventional 58W fluorescent tubes replaced with 24W L-Tube)
- 2 length options available : 1,200mm & 1,500mm
- Wide range of operating voltages (AC100V ~ 240V)
- Minimizes hotspots, compared to conventional fluorescent tubes (85% uniformity compared to 65% fluorescent tubes)
 - Wide beam angle of 165 deg. covering 330 deg
 - Equipped with rotation socket to adjust beam direction
- Waterproof & dustproof rating of IP33 (If equipped with exclusive waterproof socket)
- 180° rotatable base
- IK07 rating

| ITEM | DESCRIPTION | | NOTE |
|--------------------------|---|---------------|--|
| Input Voltage | AC100V ~ 240V, 50/60Hz | | |
| Power Consumption (W) | Under 24W | Under 22W | |
| Dimension | Ø28× 1,500mm | Ø28× 1,200mm | |
| Weight | 570g | 490g | |
| Luminous Flux | Over 2,700 lm | Over 2,400 lm | - Brightness on billboard surface is over 200cd/m ² |
| Luminous Efficacy | Typ. 120 lm/W | | |
| Beam Angle | 330° (165° × 2) | | - Based on clear cover (@6,500K) |
| CRI | Over 80 | | |
| Color Temperature | Typ. 6,500K | | |
| Power Factor | Over 0.9 | | |
| Cover | Clear (Basic), Frosted (Option) | | |
| Operating Temperature | ON: -20 °C ~ 50 °C / OFF: -25 °C ~ 70 °C | | |
| Base | G13 Base (180° rotatable) | | Left 90° Right 90° |
| Certification | CE | | |
| IP | IP33 (With Waterproof socket) | | |
| Impact Protection Rating | IK07 | | UL is pending |
| Ballast | Magnetic ballast (Vossloh-Schwabe Ref. No.508186) compatible or AC direct | | |

Color Temperature



6,500K